

Fig 103

### 月星印 青銅製 捻込スリースバルブ

常用圧力	10 kg/cm <sup>2</sup>	
試験圧力	本体	20 kg/cm <sup>2</sup>
	シート	14 kg/cm <sup>2</sup>

呼び径	d	L	H	D'
½	20.955	60	110	65
¾	26.441	67	125	73
1	33.249	70	130	80
1¼	41.910	87	155	90
1½	47.803	90	170	105
2	59.614	102	200	115
2½	75.184	120	230	137
3	87.884	145	260	160
4	113.030	162	340	200

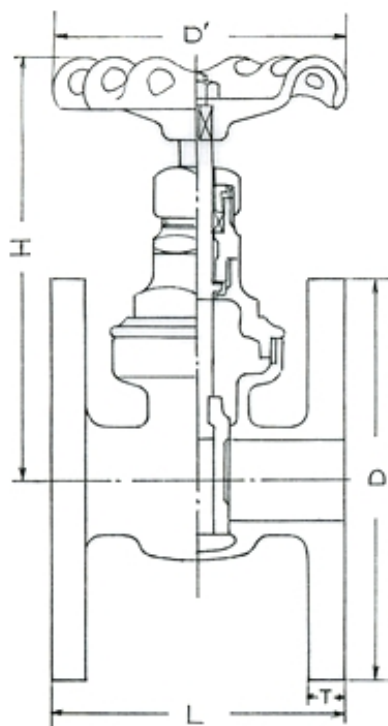


Fig 104

### 月星印 青銅製 フランジ形スリースバルブ

常用圧力	10 kg/cm <sup>2</sup>	
試験圧力	本体	20 kg/cm <sup>2</sup>
	シート	14 kg/cm <sup>2</sup>

呼び径	L	D	T	H	D'
½	72	95	9	110	65
¾	82	100	10	125	73
1	91	125	10	130	80
1¼	103	135	11	155	90
1½	120	140	12	170	105
2	140	155	12	195	137
2½	155	175	14	230	160
3	166	185	16	315	180
4	180	210	18	370	200
5	192	250	19	405	224
6	220	280	20	530	250